

DRAFT – FOR REVIEW



# **Detailed California Modified GREET Pathway for Compressed Gaseous Hydrogen from North American Natural Gas**

Stationary Source Division  
Release Date: January 20, 2009  
Version 2.0

**DRAFT – FOR REVIEW**

The Staff of the Air Resources Board developed this preliminary draft version as part of the Low Carbon Fuel Standard Regulatory Process

The ARB acknowledges contributions from the California Energy Commission, TIAX LLC and Life Cycle Associates LLC during the development of this document.

When reviewing this document, please submit comments directly to:

Anil Prabhu: [aprabhu@arb.ca.gov](mailto:aprabhu@arb.ca.gov)

Chan Pham: [cpham@arb.ca.gov](mailto:cpham@arb.ca.gov)

Alan Glabe: [aglab@arb.ca.gov](mailto:aglab@arb.ca.gov)

James Duffy: [jduffy@arb.ca.gov](mailto:jduffy@arb.ca.gov)

Ben Deal: [bdeal@arb.ca.gov](mailto:bdeal@arb.ca.gov)

**These comments will be compiled, reviewed, and posted to the LCFS website in a timely manner**

# TABLE OF CONTENTS

Table of Contents .....	i
List of Tables .....	ii
List of Figures.....	iv
Summary .....	1
CA-GREET Model Pathway for Compressed Gaseous Hydrogen Produced From North American Natural Gas .....	2
APPENDIX A.....	13
Section 1: Feedstock recovery, processing and transport to the hydrogen plant...	15
1.1 Energy and Emissions for Feedstock Recovery, Processing and Transport.	16
Section 2: Gaseous Hydrogen Production.....	18
2.1 Energy Use for Gaseous Hydrogen Production .....	19
2.2 GHG Emissions from Gaseous Hydrogen Production.....	21
Section 3: Hydrogen Liquefaction .....	26
3.1 Energy Use for Hydrogen Liquefaction .....	27
3.2 GHG Emissions from Hydrogen Liquefaction.....	29
Section 4: Hydrogen Distribution and Storage .....	31
4.1 Energy Use for Liquid Hydrogen Distribution and Storage .....	32
4.2 GHG Emissions from Hydrogen Distribution and Storage.....	34
Section 5: Hydrogen Compression .....	37
5.1 Hydrogen Compression Energy Use.....	38
5.2 GHG Emissions from Hydrogen Compression .....	38
Section 6: GHG Emissions from Vehicle .....	41
APPENDIX B.....	43
LIQUID HYDROGEN PATHWAY INPUT VALUES.....	43
Scenario: Liquid Hydrogen from North American Natural Gas using California Electricity Marginal Mix .....	44

## LIST OF TABLES

Table A. Summary of Energy Consumption and GHG Emissions for Compressed Gaseous Hydrogen .....	5
Table B. Summary of Energy Consumption and GHG Emissions for Onsite Hydrogen Production and Compression .....	6
Table C. Summary of Energy Consumption and GHG Emissions for Onsite 33% Renewable Hydrogen.....	8
Table D. Total Energy Consumption for Feedstock Recovery, Processing and Transport to the Hydrogen Plant .....	9
Table E. Total GHG Emissions from Feedstock Recovery, Processing and Transport to the Hydrogen Plant, g/mmBtu .....	9
Table F. Total Energy Consumption by Fuel Type for Gaseous Hydrogen Production .....	10
Table G. Total GHG Emissions from Gaseous Hydrogen Production, g/mmBtu.....	10
Table H. Total Energy Consumption for the Liquefaction Step.....	10
Table I. Total GHG Emissions from the Liquefaction Step, g/mmBtu .....	10
Table J. Energy Use for Liquid Hydrogen Distribution and Storage .....	11
Table K. GHG Emissions from Liquid Hydrogen Distribution, g/mmBtu .....	11
Table L. Energy Use for Hydrogen Compression.....	11
Table M. GHG Emissions from Hydrogen Compression, g/mmBtu.....	11
Table 1.1 Energy Consumption for Feedstock Recovery, Processing and Transport, Btu/mmBtu .....	16
Table 1.2 GHG Emissions From Feedstock Recovery, Processing and Transport, g/mmBtu.....	16
Table 2.1 Calculation of Direct Energy Consumption to Produce Gaseous Hydrogen	19
Table 2.2 Calculation of Total Energy Consumption from Direct Energy Consumption for Hydrogen Production .....	20
Table 2.3 Values Used to Calculate Total Energy Use from Direct Energy Use .....	20
Table 2.4 Natural Gas Fired Utility Boiler Emission Factors, g/mmBtu.....	21
Table 2.5 Direct Emissions from Hydrogen Production, g/mmBtu.....	22
Table 2.6 Calculation of Upstream CO <sub>2</sub> emissions from Direct CO <sub>2</sub> Emissions for Hydrogen Production.....	22
Table 2.7 Values Used to Calculate Upstream CO <sub>2</sub> Emissions for Hydrogen Production.....	23
Table 2.8 Upstream GHG Emissions (emissions associated with recovery & production of direct fuels used) for Hydrogen Production, g/mmBtu .....	23
Table 2.9 Direct plus Upstream GHG Emissions for Hydrogen Production, g/mmBtu	23
Table 2.10 Total GHG Emissions for Hydrogen Production, g/mmBtu .....	24
Table 3.1 Calculation of Direct Energy Consumption for Hydrogen Liquefaction from Assumed Values for Efficiency and Fuel Shares.....	27
Table 3.2 Calculation of Total Energy Use from Direct Energy Use for Hydrogen Liquefaction.....	28
Table 3.3 Values Used to Calculate Total Energy Consumption from Direct Energy Consumption for Hydrogen Liquefaction .....	28

## DRAFT – FOR REVIEW

<i>Table 3.4 Calculation of Upstream CO<sub>2</sub> Emissions for Hydrogen Liquefaction .....</i>	<i>29</i>
<i>Table 3.5 Values Used to Calculate Upstream CO<sub>2</sub> Emissions for Liquefaction .....</i>	<i>29</i>
<i>Table 3.6 Upstream GHG Emissions (emissions associated with recovery &amp; production of direct fuels used) for Hydrogen Liquefaction, g/mmBtu .....</i>	<i>29</i>
<i>Table 3.7 Total GHG Emissions for Hydrogen Liquefaction, g/mmBtu.....</i>	<i>29</i>
<i>Table 4.1. Liquid Hydrogen Distribution and Storage Energy Calculations .....</i>	<i>32</i>
<i>Table 4.2. Values Used to Calculate Distribution and Storage Energy Use .....</i>	<i>33</i>
<i>Table 4.3 Heavy Duty Diesel Truck Emission Factors.....</i>	<i>34</i>
<i>Table 4.4 Calculation of Distribution Emissions .....</i>	<i>34</i>
<i>Table 4.5 Values Used to Calculate Distribution Emissions .....</i>	<i>35</i>
<i>Table 4.6 Total GHG Emissions from Liquid Hydrogen Distribution, g/mmBtu.....</i>	<i>35</i>
<i>Table 5.1 Emission Factors for California Marginal Electricity at wall outlet, g/mmBtu</i>	<i>38</i>
<i>Table 5.2 Total GHG Emissions Associated with Hydrogen Compression, g/mmBtu</i>	<i>38</i>

## LIST OF FIGURES

<i>Figure 1. Discrete Components of the Hydrogen Pathway.....</i>	<i>4</i>
<i>Figure 2. Energy and GHG Contributions of the Hydrogen Pathway .....</i>	<i>5</i>
<i>Figure 3. Discrete Components of the Onsite Compressed Hydrogen Pathway.....</i>	<i>6</i>
<i>Figure 4. Discrete Components of the Onsite Compressed Hydrogen Pathway Under a Likely Scenario for SB1505.....</i>	<i>7</i>

**DRAFT – FOR REVIEW**

# **SUMMARY**

## CA-GREET Model Pathway for Compressed Gaseous Hydrogen Produced From North American Natural Gas

A Well-To-Tank (WTT) life cycle analysis of a fuel (or blending component of fuel) pathway includes all steps from feedstock production to final finished product. Tank-To-Wheel (TTW) analysis includes actual combustion of fuel in a motor vehicle for motive power. WTT and TTW analysis are combined together to provide a total Well-To-Wheel (WTW) analysis.

A life cycle analysis model called the **Greenhouse gases, Regulated Emissions, and Energy use in Transportation (GREET)**<sup>1</sup> developed by Argonne National Laboratory has been used to estimate the energy use and Greenhouse Gas (GHG) emissions and attendant GHG emissions generated during the entire process of hydrogen production and its use in a fuel cell vehicle. The model however, was modified by TIAX under contract to the California Energy Commission during the AB 1007 process<sup>2</sup>. Changes were restricted to mostly input factors (electricity generation factors, transportation distances, etc.) with no changes in methodology inherent in the original GREET model. This California-modified GREET model formed the basis for all the fuel pathways published by staff in mid-2008. Subsequent to this, the Argonne Model was updated in September 2008. To reflect the update and to incorporate other changes, staff contracted with Life Cycle Associates to update the CA-GREET model. This updated California modified GREET model (v1.8b) (released December 2008) forms the basis of this document. It has been used to calculate the energy use and greenhouse gas (GHG) emissions associated with a WTW analysis of the hydrogen pathway.

For this document, the output from the CA-GREET model for liquid hydrogen has been appended with calculations to deliver **gaseous compressed hydrogen** to a fuel cell vehicle in CA. A scenario where gaseous compressed hydrogen produced from on-site reformation and delivered to a vehicle as compressed hydrogen (without liquefaction and transportation involved) is also provided here. Upon request from stakeholders, an estimate for compressed hydrogen from on-site hydrogen produced under a likely scenario for SB 1505 has also been included. The last two values are not available in the CA-GREET model that has been posted on the LCFS website. Detailed calculations for these two cases have however been included in this document.

This document first details the WTT energy and inputs required to produce liquid hydrogen starting with the recovery, processing, and transport of North American Natural Gas (NA-NG) as feedstock to hydrogen plants in California (section 1), production of gaseous hydrogen (section 2), hydrogen liquefaction (section 3), and finally, distribution and storage (section 4) for use in California. The electricity mix assumed is the *California marginal mix* (NG combined cycle plants plus the non-combustion renewables to satisfy the Renewable Portfolio Standard). WTT

---

<sup>1</sup> <http://www.transportation.anl.gov/software/GREET/>

<sup>2</sup> <http://www.energy.ca.gov/ab1007/>



## DRAFT – FOR REVIEW

greenhouse gas emissions are also calculated based on the energy results above. The TTW part includes the use of compressed gaseous hydrogen in a fuel cell vehicle. Values and calculations have also been provided for two other scenarios:

- 1) delivery of compressed hydrogen from on-site reformation directly to a fuel cell vehicle
- 2) delivery of compressed on-site generated hydrogen under a likely scenario for SB1505

Several general descriptions and clarification of terminology used throughout this document are:

- CA-GREET employs a recursive methodology to calculate energy consumption and emissions. To calculate WTT energy and emissions, the values being calculated are often utilized in the calculation. For example, crude oil is used as a process fuel to recover crude oil. The total crude oil recovery energy consumption includes the direct crude oil consumption and the energy associated with crude recovery (which is the value being calculated).
- Btu/mmBtu is the energy input necessary in Btu to produce one million Btu of a finished (or intermediate) product. This description is used consistently in CA-GREET for all energy calculations. There are 1055 mmBTU per 1 MJ.
- gCO<sub>2</sub>e/MJ provides the total greenhouse gas emissions on a CO<sub>2</sub> equivalent basis per unit of energy (MJ) for a given fuel. Methane (CH<sub>4</sub>) and nitrous oxide (N<sub>2</sub>O) are converted to a CO<sub>2</sub> equivalent basis using IPCC global warming potential values and included in the total.
- CA-GREET assumes that VOC and CO are converted to CO<sub>2</sub> in the atmosphere and includes these pollutants in the total CO<sub>2</sub> value using ratios of their molecular weights.
- Process Efficiency for any step in CA-GREET is defined as:  
Efficiency = energy output / (energy output + energy consumed)
- Note that rounding of values has not been performed in several tables in this document. This is to allow stakeholders executing runs with the CA-GREET model to compare actual output values from the CA-modified model with values in this document.

Figure 1 shows the discrete components that form the compressed gaseous hydrogen from the NA-NG pathway.

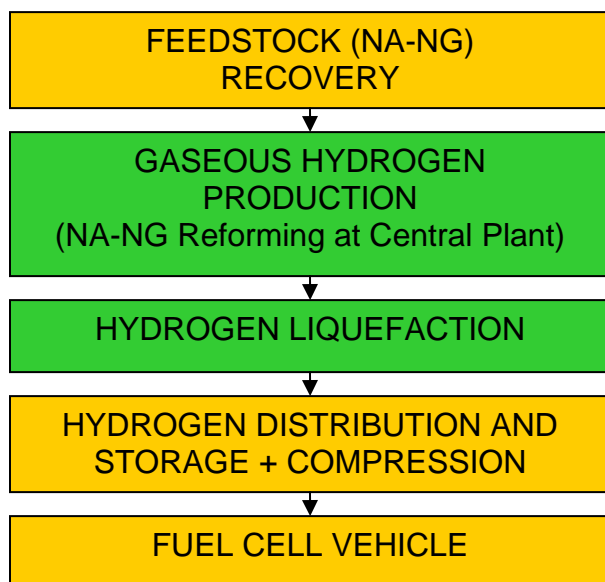


Figure 1. Discrete Components of the Hydrogen Pathway

Table A provides a summary of the results for this hydrogen pathway. The WTW analysis for hydrogen results in 2,603,961 Btu of energy required to produce 1 (one) mmBtu of available fuel energy. From a GHG perspective, 142.2 g CO<sub>2</sub>e/MJ of greenhouse gas emissions are generated during the production and use of hydrogen in a fuel cell vehicle. Note that this pathway assumes North American natural gas as feedstock.

# DRAFT – FOR REVIEW

Table A. Summary of Energy Consumption and GHG Emissions for Compressed Gaseous Hydrogen

	Energy Required (Btu/mmBtu)	% Energy Contribution	GHG Emissions (gCO <sub>2</sub> e/MJ)	% Emissions Contribution
<b>Well to Tank</b>				
Feedstock	72,417	2.8%	8.2	5.8%
Hydrogen Production	430,522	16.5%	80.9	56.9%
Hydrogen Liquefaction	830,173	31.9%	43.4	30.5%
Distribution and Storage	9,176	0.4%	0.55	0.4%
Compression	261,473	10.0%	9.2	6.5%
<b>Total (WTT)</b>	<b>1,603,961</b>	<b>61.6%</b>	<b>142.2</b>	<b>100%</b>
<b>Tank to Wheel</b>				
Carbon/Energy in Fuel	1,000,000	38.4%	0	0
Vehicle CH <sub>4</sub> and N <sub>2</sub> O	0	0	0	0
<b>Total TTW</b>	<b>1,000,000</b>	<b>38.4%</b>	<b>0</b>	<b>0</b>
<b>Total WTW</b>	<b>2,603,961</b>	<b>100%</b>	<b>142.2</b>	<b>100%</b>

Note: percentages may not add to 100 due to rounding

Figure 2 depicts the relative contribution of each discrete component of this pathway to the total energy use and total GHG emissions. From an energy viewpoint, the hydrogen liquefaction step (31.9%) and energy in fuel (38.4%) comprise the bulk of the energy contributions to the WTW pathway. From a GHG emissions perspective, hydrogen production (56.9%) and liquefaction (30.5%) dominate the GHG contributions to this pathway.

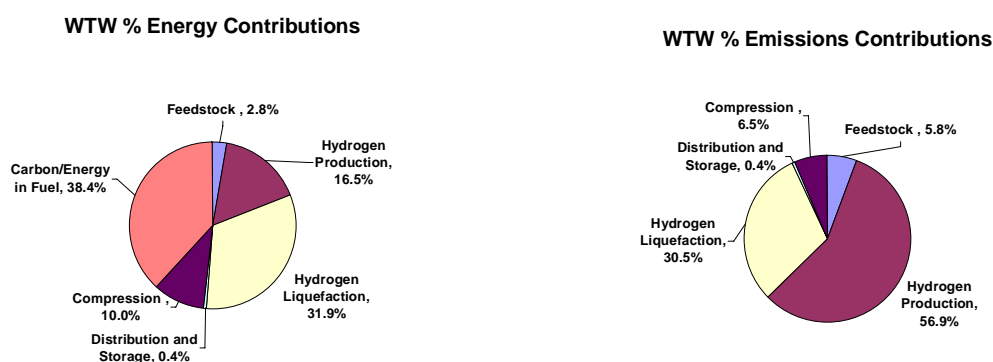


Figure 2. Energy and GHG Contributions of the Hydrogen Pathway

Figure 3 shows the discrete components that form the Onsite hydrogen production and compression from NA-NG pathway.

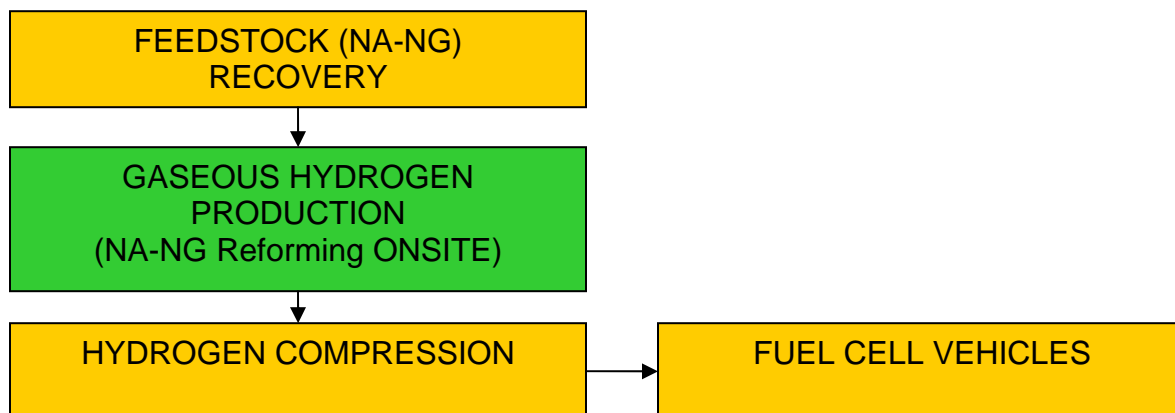



Figure 3. Discrete Components of the Onsite Compressed Hydrogen Pathway

If hydrogen is produced onsite at a refueling station, the energy and emissions will consist of feedstock, production and compression but will not contain the liquefaction and transport values of the delivered hydrogen pathway. Table B provides a summary of the results for this hydrogen pathway. The WTW analysis for hydrogen results in 1,765,318 Btu of energy required to produce 1 (one) mmBtu of available fuel energy. From a GHG perspective, 98.3 g CO<sub>2</sub>e/MJ of greenhouse gas emissions are generated during the production and use of hydrogen in a fuel cell vehicle. Note that this pathway assumes North American natural gas as feedstock.

Table B. Summary of Energy Consumption and GHG Emissions for Onsite Hydrogen Production and Compression

	Energy Required (Btu/mmBtu)	% Energy Contribution	GHG Emissions (gCO <sub>2</sub> e/MJ)	% Emissions Contribution
<b>Well to Tank</b>				
Feedstock	73,323	10%	8.2	8%
Hydrogen Production	430,522	56%	80.9	82%
Compression	261,473	34%	9.1	10%
<b>Total (WTT)</b>	<b>765,318</b>	<b>44%</b>	<b>98.3</b>	<b>100%</b>
<b>Tank to Wheel</b>				
Carbon/Energy in Fuel	1,000,000	56%	0	0
Vehicle CH <sub>4</sub> and N <sub>2</sub> O			<b>0</b>	0
<b>Total WTW</b>	<b>1,765,318</b>	<b>100%</b>	<b>98.3</b>	<b>100%</b>

Figure 4 shows the discrete components that form the Onsite hydrogen production and compression from NA-NG and Landfill Gas pathway.

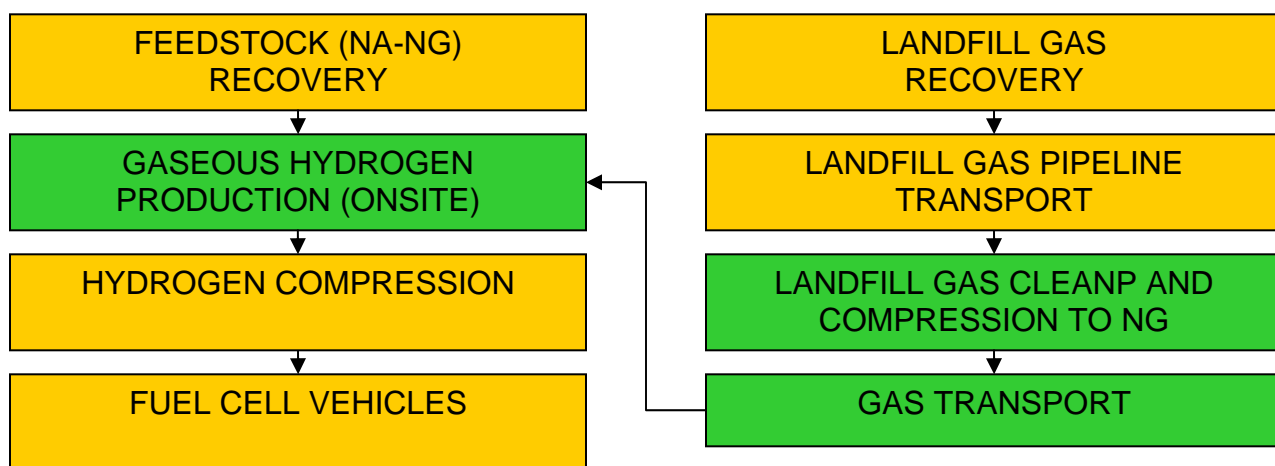

*Figure 4. Discrete Components of the Onsite Compressed Hydrogen Pathway Under a Likely Scenario for SB1505*

Hydrogen produced onsite at a refueling station with 2/3 of the feedstock from North American natural gas and 1/3 from landfill gas (from California) the energy and emissions will consist of feedstock, production, gas transport, gas cleanup and compression. Table C provides a summary of the results for pathway. The WTW analysis for hydrogen results in 1,455,915 Btu of energy required to produce 1 (one) mmBtu of available fuel energy. From a GHG perspective, 76.1 g CO<sub>2</sub>e/MJ of greenhouse gas emissions are generated during the production and use of hydrogen in a fuel cell vehicle. Note that this pathway assumes North American natural gas AND California Landfill Gas derived natural gas as feedstock.

## DRAFT – FOR REVIEW

*Table C. Summary of Energy Consumption and GHG Emissions for Onsite 33% Renewable Hydrogen*

	<b>Energy Required (Btu/mmBtu)</b>	<b>% Energy Contribution</b>	<b>GHG Emissions (gCO<sub>2</sub>e/MJ)</b>	<b>%Emissions Contribution</b>
<b>Well to Tank</b>				
Feedstock (NA-NG)	48,882	4%	5.4	7%
Feedstock (LFG)	-284,962	-21%	-16.3	-20%
Hydrogen Production	430,522	22%	80.9	66%
Compression (1/3 RE)	261,473	20%	6.1	8%
<b>Total (WTT)</b>	<b>455,915</b>	<b>31%</b>	<b>76.1</b>	<b>100%</b>
<b>Tank to Wheel</b>				
Carbon/Energy in Fuel	1,000,000	69%	0	0
Vehicle CH <sub>4</sub> and N <sub>2</sub> O			<b>0</b>	0
<b>Total WTW</b>	<b>1,455,915</b>	<b>100%</b>	<b>76.1</b>	<b>100%</b>

The following sections provide summaries of each of the WTW components of these pathways for only the case of gaseous compressed hydrogen gas from NA-NG (first case). Expanded details are provided in Appendix A. A table of all input values and assumptions is provided in Appendix B.

For detailed calculations regarding the energy use and emissions associated with recovery, processing and transport of the feedstock used here (Natural Gas) please refer to a companion document “Detailed California-Modified GREET Pathway for Compressed Natural Gas (CNG) from North American Natural Gas”, (referred to as CNG document in sections to follow). For detailed calculations regarding electricity used here as an energy source, please refer to another companion document “Detailed California-Modified GREET Pathway for California Average Electricity” (referred to as Electricity document in sections to follow). The electricity document was generated for average electricity but the use in this document has considered only a marginal electricity mix. The electricity document provides details for both average and marginal electricity. For detailed calculations regarding the energy use and emissions associated with recovery, processing and transport of Landfill Gas please refer to a companion document “Detailed California-Modified GREET Pathway for Compressed Natural Gas (CNG) from Landfill Gas”. All the companion documents listed here are available on the Low Carbon Fuel Standard website.

## Feedstock Recovery, Processing and Transport

Tables D and E provide a summary of the energy consumption and associated GHG emissions from recovery, processing and transport of the feedstock (North American Natural Gas) to the hydrogen plant. Calculation details are provided in Appendix A.

*Table D. Total Energy Consumption for Feedstock Recovery, Processing and Transport to the Hydrogen Plant*

<b>Fuel Type</b>	<b>Btu/mmBtu</b>
Natural Gas Recovery	31,207
Natural Gas Processing	31,862
Natural Gas T&D	9,348
<b>Total</b>	<b>72,417</b>

*Table E. Total GHG Emissions from Feedstock Recovery, Processing and Transport to the Hydrogen Plant, g/mmBtu*

	<b>*CO<sub>2</sub></b>	<b>CH<sub>4</sub></b>	<b>N<sub>2</sub>O</b>	<b>GHG gCO<sub>2</sub>e/mmBtu</b>	<b>GHG gCO<sub>2</sub>e/MJ</b>
Natural Gas Recovery	1,726	76.774	0.027	3,653	3.5
Natural Gas Processing	3,112	32.903	0.027	3,943	3.74
Natural Gas T&D	532	19.640	0.015	1,028	0.97
<b>Total</b>	<b>5,370</b>	<b>129.32</b>	<b>0.07</b>	<b>8,624</b>	<b>8.2</b>

\* Includes contribution from CO and VOC

## Gaseous Hydrogen Production

Tables F and G provide a summary of the energy consumption and associated GHG emissions from hydrogen production. Natural gas has two applications in the hydrogen pathway. It is both a process fuel (i.e. it provides energy to the system) and a feedstock (i.e. the origin of the hydrogen). Calculation details are provided in Appendix A.

## DRAFT – FOR REVIEW

*Table F. Total Energy Consumption by Fuel Type for Gaseous Hydrogen Production*

<b>Fuel Type</b>	<b>Btu/mmBtu</b>
Natural Gas (Process Fuel)	256,210
Electricity	1,608
Natural Gas (Feedstock)	172,704
<b>Total</b>	<b>430,522</b>

*Table G. Total GHG Emissions from Gaseous Hydrogen Production, g/mmBtu*

	<b>*CO<sub>2</sub></b>	<b>CH<sub>4</sub></b>	<b>N<sub>2</sub>O</b>	<b>GHG gCO<sub>2</sub>e/mmBtu</b>	<b>GHG gCO<sub>2</sub>e/MJ</b>
Natural Gas (Process Fuel)	15,160.53	33.44	0.092	15,957.034	15.12
Electricity?	84.25	0.190	0.002	89.24	0.08
Natural Gas (Feedstock)	68,738.15	22.36	0.011	69,255.84	65.64
<b>Total</b>	<b>83,982.9</b>	<b>56</b>	<b>0.1</b>	<b>85,302.1</b>	<b>80.9</b>

\* Includes contribution from CO and VOC

## Hydrogen Liquefaction

Tables H and I provide the energy consumption and associated GHG emissions from liquefaction of the gaseous hydrogen. Calculation details are provided in Appendix A.

*Table H. Total Energy Consumption for the Liquefaction Step*

<b>Fuel Type</b>	<b>Btu/mmBtu</b>
Electricity	827,122
Feedstock Loss	3,051
<b>Total Energy</b>	<b>830,173</b>

*Table I. Total GHG Emissions from the Liquefaction Step, g/mmBtu*

	<b>*CO<sub>2</sub></b>	<b>CH<sub>4</sub></b>	<b>N<sub>2</sub>O</b>	<b>GHG gCO<sub>2</sub>e/mmBtu</b>	<b>GHG gCO<sub>2</sub>e/MJ</b>
Electricity	43,277	96.7	1.1	45,817	<b>43.4</b>

\* Includes contribution from CO and VOC



## Liquid Hydrogen Distribution and Storage

Tables J and K summarize energy consumption and GHG emissions from liquid hydrogen distribution and storage. Calculation details are provided in Appendix A.

*Table J. Energy Use for Liquid Hydrogen Distribution and Storage*

<b>Fuel Type</b>	<b>Btu/mmBtu</b>
Distribution Truck Energy	7,299
Distribution Feedstock Loss	60
Storage Feedstock Loss	1,816
<b>Total Energy</b>	<b>9,176</b>

*Table K. GHG Emissions from Liquid Hydrogen Distribution, g/mmBtu*

	<b>*CO<sub>2</sub></b>	<b>CH<sub>4</sub></b>	<b>N<sub>2</sub>O</b>	<b>GHG gCO<sub>2</sub>e/mmBtu</b>	<b>GHG gCO<sub>2</sub>e/MJ</b>
Distribution Truck	563.1	0.63	0.01	581.6	<b>0.55</b>

\* Includes contributions from VOC and CO.

## Hydrogen Compression

Tables L and M summarize energy consumption and GHG emissions from hydrogen compression. Calculation details are provided in Appendix A.

*Table L. Energy Use for Hydrogen Compression*

<b>Fuel Type</b>	<b>Btu/mmBtu</b>
Direct Electricity	86,957
Total Electricity	174,516
<b>Total Energy</b>	<b>261,473</b>

*Table M. GHG Emissions from Hydrogen Compression, g/mmBtu*

	<b>*CO<sub>2</sub></b>	<b>CH<sub>4</sub></b>	<b>N<sub>2</sub>O</b>	<b>GHG gCO<sub>2</sub>e/mmBtu</b>	<b>GHG gCO<sub>2</sub>e/MJ</b>
Distribution Truck	563.1	20.64	0.23	9687.4	<b>9.11</b>

\* Includes contributions from VOC and CO.

## Vehicle N<sub>2</sub>O and CH<sub>4</sub>

Since Fuel Cell vehicles are assumed to generate no emissions, all CO<sub>2</sub>, CO, VOC, CH<sub>4</sub> and N<sub>2</sub>O emissions are assumed to be zero. The details are shown in Table N.

*Table N. Energy Use and GHG Emissions From Hydrogen, g/mmBtu*

	<b>CO<sub>2</sub></b>	<b>CH<sub>4</sub></b>	<b>N<sub>2</sub>O</b>	<b>GHG gCO<sub>2</sub>e/mmBtu</b>	<b>GHG gCO<sub>2</sub>e/MJ</b>
Fuel Cell Vehicles	0	0	0	0	0

**DRAFT – FOR REVIEW**

## **APPENDIX A**

**DRAFT – FOR REVIEW**

**This Page Intentionally Left Blank**

## **SECTION 1: FEEDSTOCK RECOVERY, PROCESSING AND TRANSPORT TO THE HYDROGEN PLANT**

## 1.1 Energy and Emissions for Feedstock Recovery, Processing and Transport

This hydrogen pathway assumes that North American natural gas is used as the feedstock. For a detailed description of North American Natural gas recovery, processing and transport please refer to the CNG pathway document available on the LCFS website.

The energy and emissions for natural gas recovery, processing and transport are multiplied by the hydrogen pathway loss factors (L1, L2, and L3) which are described in sections 3.1 and 4.1. These are the losses associated with boil-off of the liquid hydrogen at the central plant, during transport, and from storage tanks at the hydrogen fueling station, respectively. Table 1.1 provides the energy consumption associated with the feedstock while Table 1.2 provides the GHG emissions.

*Table 1.1 Energy Consumption for Feedstock Recovery, Processing and Transport, Btu/mmBtu*

<b>Process*</b>	<b>Direct Energy Consumption</b>	<b>Energy Use with Loss Factors Applied</b>
Natural Gas Recovery	28,806	31,207
Natural Gas Processing	28,807	31,862
Natural Gas Transport	8,548	9,348
<b>Total</b>	<b>66,161</b>	<b>72,417</b>

Note: \* See CNG pathway document released January 2009 for more details. Loss Factor =  $L_1 * L_2 * L_3 = 1.0005$ . (See sections 1.3 and 1.4)

*Table 1.2 GHG Emissions From Feedstock Recovery, Processing and Transport, g/mmBtu*

<b>Process</b>	<b>CH<sub>4</sub></b>	<b>N<sub>2</sub>O</b>	<b>CO<sub>2</sub>*</b>	<b>GHG, gCO<sub>2</sub>e/mmBtu</b>	<b>GHG, gCO<sub>2</sub>e/MJ</b>
Natural Gas Recovery	76.8	0.027	1,726	3,653	3.5
Natural Gas Processing	32.9	0.027	3,112	3,943	3.74
Natural Gas Transport	19.64	0.015	532	1,028	0.97
<b>Total</b>	<b>129.34</b>	<b>0.07</b>	<b>5,370</b>	<b>8,624</b>	<b>8.2</b>

\* Includes contributions from VOC and CO. CH<sub>4</sub> and N<sub>2</sub>O also are converted to CO<sub>2</sub>e. Hydrogen pathway loss factors applied to all values.

**DRAFT – FOR REVIEW**

**This Page Intentionally Left Blank**

## **SECTION 2: GASEOUS HYDROGEN PRODUCTION**



## 2.1 Energy Use for Gaseous Hydrogen Production

Once the natural gas is at the hydrogen plant, gaseous hydrogen is produced through steam reforming. There are three key assumptions made to calculate direct energy consumption for natural gas recovery:

- Process efficiency (71.5%, CA-GREET Default)
- Fuel shares (split of total energy consumed by fuel type, CA-GREET Default)
- Percent of the total natural gas that is utilized as a feedstock (83% of the natural gas consumed becomes hydrogen; the balance is used as a process fuel.)

The assumed process efficiency of 71.5% means that 0.715 Btu of hydrogen are produced from each Btu of direct energy consumed. The efficiency assumption is coupled with an assumed split of fuels used in natural gas recovery to arrive at direct energy use by fuel to produce hydrogen. The results of this calculation are provided in Table 2.1.

*Table 2.1 Calculation of Direct Energy Consumption to Produce Gaseous Hydrogen*

Process Fuel Type	Fuel Shares	Relationship of Production Efficiency and Fuel Shares	Direct Energy Consumption, Btu/mmBtu
Natural Gas (Process + Feedstock)	99.8%	$(10^6)(1/71.5\% - 1)(99.8\%)$	397,804
Electricity	0.2%	$(10^6)(1/71.5\% - 1)(0.2\%)$	797
<b>Total Direct Energy Consumption for Hydrogen Production</b>			<b>398,601</b>

Once the total natural gas consumption is determined it must be split into two parts: process fuel and feedstock. The baseline assumption is that 83% of the natural gas goes to hydrogen (feedstock) while 17% is used as a process fuel. The amount of natural gas utilized as a process fuel is calculated as follows:

$$\begin{aligned} \text{Natural Gas (Process Fuel)} &= (10^6/\text{production efficiency} - \text{electricity}) * 17\% \\ &= (10^6/0.715 - 797) * 17\% = 237,627 \text{ Btu/mmBtu} \end{aligned}$$

$$\begin{aligned} \text{Natural Gas (Feedstock)} &= \text{Total Natural Gas Use} - \text{Process Natural Gas} \\ &= 397,804 - 237,627 = 160,178 \text{ Btu/mmBtu} \end{aligned}$$

The values provided in Table 2.1 are *direct* energy consumption for the hydrogen production step. This is not the *total* energy required however, since CA-GREET accounts for the “upstream” energy associated with each of the fuels utilized to recover natural gas. For example, 797 Btu of electricity are required to produce each mmBtu of hydrogen. The total energy associated with the 797 Btu of electricity

## DRAFT – FOR REVIEW

includes the energy to recover the feedstocks and the losses associated with electric power plant efficiency and transmission.

Table 2.2 demonstrates how the direct energy values shown in Table 2.1 are utilized to calculate total energy required to produce hydrogen. Table 2.3 provides details on the values used in Table 2.2.

*Table 2.2 Calculation of Total Energy Consumption from Direct Energy Consumption for Hydrogen Production*

<b>Fuel Type</b>	<b>Formula</b>	<b>Btu/mmBtu</b>
Natural Gas (Process Fuel)	$(A + A*(B + C + D) / 10^6) * L1 * L2 * L3$	256,210
Electricity	$(E *(F + G) / 10^6) * L1 * L2 * L3$	1,608
Natural Gas (Feedstock)	$(H + H*(B + C + D) / 10^6) * L1 * L2 * L3$	172,704
<b>Total energy for hydrogen production</b>		<b>430,522</b>

*Table 2.3 Values Used to Calculate Total Energy Use from Direct Energy Use*

<b>Variable</b>	<b>Description</b>
A	237,627 Btu of process NG fuel used per mmBtu hydrogen produced. (see discussion below Table 2.1)
B	Total energy to recover NG is 31,007 Btu/mmBtu NG. (See CNG document)
C	31,315 Btu are used to process 1 mmBtu NG. (See CNG document)
D	10,596 Btu are used to transport 1 mmBtu NG to the hydrogen plant. (See CNG document)
E	797 Btu of direct electricity used to recover 1 mmBtu NG. (see Table 2.1)
F	120,830 Btu of energy used to recover and transport sufficient feedstock to generate 1 mmBtu electricity. (See Electricity document but modified for marginal production)
G	1,884,989 Btu used to produce 1 mmBtu electricity. (See Electricity document but modified for marginal production)
H	160,178 Btu of feedstock NG used per mmBtu hydrogen produced. (see discussion below Table 2.1)
L1	1.003 loss factor for hydrogen storage at plant after liquefaction, a CA-GREET calculation. (See section 3.1)
L2	1.0001 loss factor for liquid hydrogen transport, a CA-GREET calculation. (See section 4.1)
L3	1.005 loss factor for liquid hydrogen storage, a CA-GREET calculation. (See section 4.1)

## 2.2 GHG Emissions from Gaseous Hydrogen Production

The emission calculation methodology is analogous to the energy calculations. First the direct emissions are calculated and then the upstream emissions (due to recovery and processing of each direct fuel used) are added. To calculate the direct emissions, direct energy by fuel type (here only natural gas) is multiplied by the technology share (% fired in turbine, boiler, engine etc) and then multiplied by the appropriate emission factor. Emissions of CO<sub>2</sub>, N<sub>2</sub>O and CH<sub>4</sub> due to combustion are quantified. In addition, emissions of VOC and CO are quantified and assumed to convert to CO<sub>2</sub> in the atmosphere. The conversions are calculated as follows:

$$\text{CO (g/mmBtu)} * 44 \text{ gCO}_2/\text{gmole} / 28 \text{ gCO/gmole} * 0.43 \text{ gC/gCO}$$

$$\text{VOC (g/mmBtu)} * 44 \text{ gCO}_2/\text{gmole} / 12 \text{ gC/gmole} * 0.85 \text{ gC/gVOC}$$

In this case, the only process fuel with direct emissions is natural gas and it is assumed (CA-GREET Default) to be fully combusted in an industrial/utility boiler. Table 2.4 provides the emission factors utilized.

*Table 2.4 Natural Gas Fired Utility Boiler Emission Factors, g/mmBtu*

GHG	Emission Factor, g/mmBtu	Notes
VOC	0	Assume offsets required (new plant)
CO	8.5	BACT. GREET value is 16.42
CH <sub>4</sub>	1.13	AP-42 (GREET value is 1.10)
N <sub>2</sub> O	0.315	AP-42 (GREET value is 1.1)
CO <sub>2</sub>	58,198	CA-GREET Default

The direct emissions from hydrogen production are based on the direct energy use (237,627 Btu/mmBtu – the process natural gas not the feedstock natural gas, see Section 2.1). Multiplying the direct energy by the emission factors in Table 2.4 yields the direct emissions provided in Table 2.5. Note that there are no direct emissions from direct electricity use. For the portion of the natural gas that becomes feedstock, the carbon ultimately goes to CO<sub>2</sub> and this value is shown.

The natural gas feedstock CO<sub>2</sub> emissions are calculated by determining the CO<sub>2</sub> potential (all carbon to CO<sub>2</sub>) due to the total natural gas input (process + feedstock) and subtracting the carbon emissions of the natural gas process share:

$$\text{CO}_2 \text{ Potential} = (\text{Process NG} + \text{Feedstock NG} + 1,000,000) \times \text{NG density} / \text{NG LHV} \times \text{NG Carbon content} \times \text{ratio of molecular weights}$$

$$= 1,397,804 \text{ Btu/mmBtu} \times 20.4 \text{ g/scf} / 930 \text{ Btu/scf} \times 0.724 \text{ gC/gNG} \times 44/12$$

$$= 81,396 \text{ g CO}_2/\text{mmBtu}$$

## DRAFT – FOR REVIEW

Therefore, the CO<sub>2</sub> potential emissions associated with the feedstock natural gas are the total less the process and is given by:

$$\text{Feedstock CO}_2 \text{ Potential} = 81,396 - 13,837 = 67,559 \text{ g CO}_2/\text{mmBtu}$$

*Table 2.5 Direct Emissions from Hydrogen Production, g/mmBtu*

	VOC	CO	CH <sub>4</sub>	N <sub>2</sub> O	CO <sub>2</sub>	CO <sub>2</sub> *	GHG	GHG gCO <sub>2</sub> e/MJ
Natural Gas Process	0	2.02	0.269	0.075	13,833	13,837	13,865	13.1
Electricity	0	0	0	0	0	0	0	0
Natural Gas Feedstock	0	0	0	0	67,559	67,559	67,559	64.1
<b>Total Direct</b>	<b>0</b>	<b>2.02</b>	<b>0.27</b>	<b>0.075</b>	<b>81,392</b>	<b>81,395</b>	<b>81,424</b>	<b>77.2</b>

\* Includes contributions from VOC and CO. CH<sub>4</sub> and N<sub>2</sub>O also are converted to CO<sub>2</sub>e.

Table 2.5 above provides direct emissions. Similar to total energy, the total emissions include direct emissions plus the emissions associated with recovery and processing/refining the fuels used to produce hydrogen. Table 2.6 illustrates the calculation methodology for upstream CO<sub>2</sub> emissions for hydrogen production. Similar calculations are performed for the other pollutants. Table 2.7 provides the values used in Table 2.6.

*Table 2.6 Calculation of Upstream CO<sub>2</sub> emissions from Direct CO<sub>2</sub> Emissions for Hydrogen Production*

Fuel Type	Formula	g/mmBtu
Natural Gas (Process)	$A*(B+C+D)/10^6$	1,285
Electricity	$E (F + G)/ 10^6$	83.8
Natural Gas (Feedstock)	$H*(B+C+D)/10^6$	866
<b>Total</b>		<b>2,234.8</b>

Table 2.8 summarizes the upstream emissions for each GHG contributor. The direct and indirect emissions are summed and presented in Table 2.9. Finally, three loss factors are applied (please refer to Table 2.3) and the overall results are presented in Table 2.10.

*Table 2.7 Values Used to Calculate Upstream CO<sub>2</sub> Emissions for Hydrogen Production*

<b>Variable</b>	<b>Description</b>
A	237,627 Btu of direct NG fuel used per mmBtu hydrogen produced
B	1,762 g CO <sub>2</sub> /mm Btu NG for NG recovery
C	3,112 g CO <sub>2</sub> /mmBtu NG for NG processing (1,761 + 1,237)
D	532 g CO <sub>2</sub> /mmBtu NG for NG transport to the hydrogen plant
E	797 Btu of direct electricity used per mmBtu of hydrogen produced
F	8,773 g/mmBtu CO <sub>2</sub> to produce & transport feedstocks for electricity
G	96,314 g CO <sub>2</sub> to produce 1 mmBtu electricity
H	160,178 Btu of NG use as feedstock per mmBtu hydrogen produced

*Table 2.8 Upstream GHG Emissions (emissions associated with recovery & production of direct fuels used) for Hydrogen Production, g/mmBtu*

	<b>VOC</b>	<b>CO</b>	<b>CH<sub>4</sub></b>	<b>N<sub>2</sub>O</b>	<b>CO<sub>2</sub></b>
Natural Gas (Process)	1.66	2.13	33	0.017	1,285
Electricity	0.009	0.02	0.2	0.002	83.8
Natural Gas (Feedstock)	1.12	1.44	22.25	0.011	866
<b>Total Indirect</b>	<b>2.8</b>	<b>3.6</b>	<b>55.4</b>	<b>0.03</b>	<b>2,234.8</b>

Note: See table 2.6 for detail calculations

*Table 2.9 Direct plus Upstream GHG Emissions for Hydrogen Production, g/mmBtu*

	<b>VOC</b>	<b>CO</b>	<b>CH<sub>4</sub></b>	<b>N<sub>2</sub>O</b>	<b>CO<sub>2</sub></b>
Natural Gas (Process)	1.66	4.15	33.28	0.092	15,118
Electricity	0.009	0.023	0.2	0.002	84
Natural Gas (Feedstock)	1.12	1.435	22.25	0.011	68,425
<b>Total</b>	<b>2.8</b>	<b>5.6</b>	<b>55.7</b>	<b>0.1</b>	<b>83,627</b>

Note: Table 2.5 results plus Table 2.8 results

## DRAFT – FOR REVIEW

*Table 2.10 Total GHG Emissions for Hydrogen Production, g/mmBtu*

	<b>CO<sub>2</sub>*</b>	<b>CH<sub>4</sub></b>	<b>N<sub>2</sub>O</b>	<b>GHG gCO<sub>2</sub>e/mmBtu</b>	<b>GHG gCO<sub>2</sub>e/MJ</b>
Natural Gas (Process)	15,160	33.4	0.1	15,957	15.1
Electricity	84	0.2	0.002	89	0.1
Natural Gas (Feedstock)	68,738	22.4	0.01	69,255	65.6
<b>Total</b>	<b>83,983</b>	<b>56</b>	<b>0.1</b>	<b>85,302</b>	<b>80.9</b>

\* Includes contributions from VOC and CO. CH<sub>4</sub> and N<sub>2</sub>O also are converted to CO<sub>2</sub>e.

**DRAFT – FOR REVIEW**

**This Page Intentionally Left Blank**

## **SECTION 3: HYDROGEN LIQUEFACTION**



### 3.1 Energy Use for Hydrogen Liquefaction

The next step in the hydrogen pathway is liquefaction. The methodology to calculate direct and total energy for liquefaction is the same as that to calculate direct and total energy for hydrogen production. The key assumptions are:

- Process efficiency (71.0%, CA-GREET Default)
- Fuel shares (100% electricity, CA-GREET Default)
- Hydrogen boil off (utilized to calculate liquefaction loss factor)

The electricity mix assumed is the California marginal mix (NG combined cycle plants plus the non-combustion renewables to satisfy the Renewable Portfolio Standard). The electricity document provides complete details on the marginal electricity mix.

Table 3.1 illustrates how direct energy consumption is calculated based on process efficiency and fuel shares.

*Table 3.1 Calculation of Direct Energy Consumption for Hydrogen Liquefaction from Assumed Values for Efficiency and Fuel Shares*

Process Fuel Type	Fuel Shares	Relationship of Efficiency (0.625) and Fuel Shares	Direct Energy Consumption, Btu/mmBtu
Electricity	100%	$(10^6)(1/0.71 - 1)(1)$	408,450
Feedstock Loss	n/a	See discussion below	3,046
<b>Direct Energy Consumption for Hydrogen Liquefaction</b>			<b>411,497</b>

The feedstock loss is the energy associated with “boil off” losses of stored liquid hydrogen at the production plant. The quantity of hydrogen loss is calculated as follows:

$$\begin{aligned} \text{H}_2 \text{ loss (g/mmBtu)} &= \frac{(0.3\%/day \times 5 \text{ days} / 30,500 \text{ Btu/gal} \times 268 \text{ g/gal} \times 10^6) \times (1-80\%)}{(1 - 0.3\%/day \times 5 \text{ days})} \\ &= 26.762 \text{ g/mmBtu} \end{aligned}$$

As can be seen, an 80% boil-off recovery is assumed. The energy associated with this loss is calculated as follows:

$$\begin{aligned} \text{Feedstock Loss (Btu/mmBtu)} &= 26.762 \text{ g/mmBtu} / 268 \text{ g/gal} \times 30,500 \text{ Btu/gal} \\ &= 3,046 \text{ Btu/mmBtu} \end{aligned}$$

## DRAFT – FOR REVIEW

Note: An error has been found in the loss factor calculations in CA-GREET version developed as part of the AB 1007 analysis. The error overestimates the loss factors due to boil-off of liquid hydrogen because it does not include the boil-off recovery rates (80% assumed here). The AB1007 values for this pathway are therefore overestimated. This error has been corrected in GREET1.8b and has been corrected here.

The loss factor associated with storage of liquid hydrogen at the plant (L1 in Table 2. 3) is based on this boil-off value. The loss factor is calculated as follows:

$$\text{Loss Factor L1} = 1 + 26.762 \text{ g/mmBtu} / 268 \text{ g/gal} * 30,500 \text{ Btu/gal} / 10^6 \text{ Btu/mmBtu} \\ = 1.003$$

The values provided in Table 3. 1 are direct energy consumption per Btu for the hydrogen liquefaction step. This is not the total energy required however, since CA-GREET accounts for the “upstream” energy associated with each of the fuels utilized to recover natural gas. Table 3.2 demonstrates how the direct energy consumption values shown in Table 3.1 and values in Table 3.3 are utilized to calculate total energy required to liquefy hydrogen.

*Table 3.2 Calculation of Total Energy Use from Direct Energy Use for Hydrogen Liquefaction*

<b>Fuel Type</b>	<b>Formula</b>	<b>Btu/mmBtu</b>
Electricity	$A * (B + C) / 10^6 * L2 * L3$	827,122
Feedstock Loss	$D * L2 * L3$	3,051
<b>Total Energy Consumption for Hydrogen Liquefaction</b>		<b>830,173</b>

*Table 3.3 Values Used to Calculate Total Energy Consumption from Direct Energy Consumption for Hydrogen Liquefaction*

<b>Variable</b>	<b>Description</b>
A	411,497 Btu of direct electricity used to liquefy 1 mmBtu hydrogen.
B	120,830 Btu of energy used to recover and transport sufficient feedstock to generate 1 mmBtu electricity.
C	1,884,989 Btu used to produce 1 mmBtu electricity.
D	3,046 Btu hydrogen loss per mmBtu hydrogen produced
L2	1.0001 loss factor for liquid hydrogen transport, a CA-GREET calculation. (See section 4.1)
L3	1.002 loss factor for liquid hydrogen storage, a CA-GREET calculation (See section 4.1)

### 3.2 GHG Emissions from Hydrogen Liquefaction

Because the only process fuel utilized in hydrogen liquefaction is electricity, there are no direct emissions for this step. Table 3.4 provides the upstream CO<sub>2</sub> emission calculations and Table 3.5 provides the values used in the terms of Table 3.4. Table 3.6 provides the upstream emissions for each GHG contributor. Table 3.7 combines the upstream and direct GHG emissions, converts VOC and CH<sub>4</sub> to CO<sub>2</sub>, and applies loss factors L2 and L3 (see Table 3.3).

*Table 3.4 Calculation of Upstream CO<sub>2</sub> Emissions for Hydrogen Liquefaction*

Fuel Type	Formula	g/mmBtu
Electricity	$A*(B + C)/ 10^6$	43,243

*Table 3.5 Values Used to Calculate Upstream CO<sub>2</sub> Emissions for Liquefaction*

Variable	Description
A	411,497 Btu of direct electricity used to liquefy 1 mmBtu hydrogen.
B	8,773 g/mmBtu CO <sub>2</sub> to produce & transport feedstock for electricity production
C	96,314 g CO <sub>2</sub> to produce 1 mmBtu electricity.

*Table 3.6 Upstream GHG Emissions (emissions associated with recovery & production of direct fuels used) for Hydrogen Liquefaction, g/mmBtu*

	VOC	CO	CH <sub>4</sub>	N <sub>2</sub> O	CO <sub>2</sub>
Electricity	4.76	11.9	97.68	1.07	43,243

Note: See example calculation of CO<sub>2</sub> in Table 3.4

*Table 3.7 Total GHG Emissions for Hydrogen Liquefaction, g/mmBtu*

	CH <sub>4</sub>	N <sub>2</sub> O	CO <sub>2</sub> *	GHG g CO <sub>2</sub> e/mmBtu	GHG gCO <sub>2</sub> e/MJ
Electricity	96.68	1.07	43,277	45,817	43.4

\* Includes contributions from VOC and CO. CH<sub>4</sub> and N<sub>2</sub>O also are converted to CO<sub>2</sub>e.

**DRAFT – FOR REVIEW**

**This Page Intentionally Left Blank**

## **SECTION 4: HYDROGEN DISTRIBUTION AND STORAGE**

#### 4.1 Energy Use for Liquid Hydrogen Distribution and Storage

The final step in this hydrogen pathway is delivery by truck and storage at the fueling station. For the delivery component, it is assumed that liquid hydrogen is delivered by heavy duty diesel trucks over a distance of 50 miles directly to retail stations (no intermediate stops at fuel terminals). In addition to truck fuel consumption, there are energy losses associated with hydrogen boil off from the truck. At the retail station, there are no emissions, but there is an energy loss associated with boil-off from storage tanks. Table 4.1 illustrates the energy consumption calculations while Table 4.2 provides the values utilized in the formulas.

*Table 4.1. Liquid Hydrogen Distribution and Storage Energy Calculations*

Parameter	Units	Formula	Value
Truck Energy Intensity	Btu/ton-mile	(Diesel LHV, Btu/gal) / (truck fuel economy, mi/gal) / (payload, tons)	6,423
Truck Energy Use	Btu/mmBtu	(Liquid H <sub>2</sub> density, g/gal) / (Liquid H <sub>2</sub> LHV, Btu/gal) * (10 <sup>6</sup> Btu/mmBtu) / (454 g/lb) / (2000 lb/ton) * (roundtrip miles) * (energy intensity) * (1+WTT diesel energy)	7,299
Truck Feedstock Loss	Btu/mmBtu	((Transit time, days) * (Boil-off rate, %/day)) / (1 – (transit time) * (Boil-off rate)) * 10 <sup>6</sup> Btu/mmBtu * (1 – recovery rate)	60
Storage Loss	Btu/mmBtu	((Storage time, days) * (Boil-off rate, %/day)) / (1 – (storage time) * (Boil-off rate)) * 10 <sup>6</sup> Btu/mmBtu * (1 – recovery rate)	1,816
<b>Total Distribution and Storage Energy</b>	Btu/mmBtu	Truck Energy + Distribution Loss + Storage Loss	<b>9,176</b>

*Table 4.2. Values Used to Calculate Distribution and Storage Energy Use*

	<b>Units</b>	<b>Value</b>	<b>Comments</b>
Diesel LHV	Btu/gal	128,450	CA-GREET Default
Truck Fuel Economy	Mi/gal	5	CA-GREET Default
Truck Liquid H <sub>2</sub> Payload	Tons	4	CA-GREET Default
Liquid H <sub>2</sub> Density	g/gal	268	CA-GREET Default
Liquid H <sub>2</sub> LHV	Btu/gal	30,500	CA-GREET Default
Distance (roundtrip)	Miles	100	CA-GREET Default
WTT diesel energy	Btu/Btu	0.174	CA-GREET Calculation
Truck Transit Time	Days	0.1	CA-GREET Default
Truck Boil-off rate	%/day	0.3%	CA-GREET Default
Truck Boil-off Recovery	%	80%	CA-GREET Default
Storage Time	Days	3	CA-GREET Default
Storage Boil-off rate	%/day	0.3%	CA-GREET Default
Storage Boil-off recovery	%	80%	CA-GREET Default

Two of the loss factors utilized throughout the pathway are quantified at this step: the distribution loss factor L2 and the storage loss factor L3. Similar to the calculation of L1 described in Section 3, L2 and L3 are based on the evaporative hydrogen losses (boil-off). The loss factor is calculated as follows:

Loss factor =  $1 + (\text{storage days} * \text{loss rate, \%/day}) / (1 - \text{days} * \text{loss rate, \%/day}) * (1 - \text{recovery rate})$ .

$$L2 = 1 + (0.1 * 0.3\%) / (1 - 0.1 * 0.3\%) * (1 - 80\%) = 1.0001$$

$$L3 = 1 + (3 * 0.3\%) / (1 - 3 * 0.3\%) * (1 - 80\%) = 1.002$$

## 4.2 GHG Emissions from Hydrogen Distribution and Storage

The GHG emissions from the distribution and storage consist entirely of emissions from the diesel truck over the 100 mile roundtrip distance. Table 4.3 provides the heavy duty truck emission factors utilized. These VOC and CO emission factors are based on EMFAC2007. The CH<sub>4</sub> and N<sub>2</sub>O values are from the Climate Action Registry Reporting Protocol, and the CO<sub>2</sub> value is calculated from fuel composition subtracting out the VOC, CO and methane carbon.

*Table 4.3 Heavy Duty Diesel Truck Emission Factors*

Pollutant	g/mi	g/mmBtu diesel
VOC	1.2	45.7
CO	4.2	162.1
CH <sub>4</sub>	0.03	1.29
N <sub>2</sub> O	0.05	2
CO <sub>2</sub>	1,998.6	77,798

Note: The g/mi values are converted to a g/mmBtu diesel basis by multiplying by miles/gal, dividing by diesel LHV in Btu/gal and multiplying by one million.

e.g.: for VOC (1.2 g/mi) x (5 miles/gal) / (128,450 Btu/gal) \* 10<sup>6</sup> = 45.7 g/mmBtu

Table 4.4 illustrates the equations utilized to calculate distribution emissions and Table 4.5 provides the values used in the equations. Total GHG emissions are provided in Table 4.6 (VOC and CO are converted to CO<sub>2</sub> and a composite CO<sub>2</sub> equivalent value is provided).

*Table 4.4 Calculation of Distribution Emissions*

Parameter	Formula	Value
Transport Energy Btu diesel/Btu Liquid H <sub>2</sub>	(Liquid H <sub>2</sub> Density, g/gal) / Liquid H <sub>2</sub> LHV, Btu/gal) / 454 g/lb / 2000 lb/ton * (Energy Intensity, Btu/ton-mile) * (Roundtrip miles)	0.00622
VOC, g/mmBtu	Transport Energy * (Direct Emission factor + WTT Diesel Emission) of VOC	0.33
CO, g/mmBtu	Transport Energy * (Direct Emission factor + WTT Diesel Emission) of CO	1.09
CH <sub>4</sub> , g/mmBtu	Transport Energy * (Direct Emission factor + WTT Diesel Emission) of CH <sub>4</sub>	0.6
N <sub>2</sub> O, g/mmBtu	Transport Energy * (Direct Emission factor + WTT Diesel Emission) of N <sub>2</sub> O	0.013
CO <sub>2</sub> , g/mmBtu	Transport Energy * (Direct Emission factor + WTT Diesel Emission) of CO <sub>2</sub>	560



## DRAFT – FOR REVIEW

*Table 4.5 Values Used to Calculate Distribution Emissions*

Parameter	Units	Value	Comments
Liquid H <sub>2</sub> Density	g/gal	268	Assumed Value
Liquid H <sub>2</sub> LHV	Btu/gal	30,500	Assumed Value
Energy Intensity	Btu/ton-mile	6,423	See Table 4.1
Roundtrip miles	Miles	100	Assumed Value
WTT Diesel VOC	g/mmBtu	7.62	Calculated Value
WTT Diesel CO	g/mmBtu	12.89	Calculated Value
WTT Diesel CH <sub>4</sub>	g/mmBtu	100.42	Calculated Value
WTT Diesel N <sub>2</sub> O	g/mmBtu	0.27	Calculated Value
WTT Diesel CO <sub>2</sub>	g/mmBtu	12,357	Calculated Value

Example calculation for CO<sub>2</sub> emission: 0.00622 Btu diesel/ Btu Liquid H<sub>2</sub>\* (77,798 g/mmBtu + 12,357 g/mmBtu) = 560 g/mmBtu (as shown in Table 4.4)

*Table 4.6 Total GHG Emissions from Liquid Hydrogen Distribution, g/mmBtu*

	CH <sub>4</sub>	N <sub>2</sub> O	CO <sub>2</sub> *	GHG g CO <sub>2</sub> e/mmBtu	GHG g CO <sub>2</sub> e/MJ
Truck Emissions	0.6	0.013	563.1	581.6	<b>0.55</b>

Includes contributions from VOC and CO. CH<sub>4</sub> and N<sub>2</sub>O also are converted to CO<sub>2</sub>e.

**DRAFT – FOR REVIEW**

**This Page Intentionally Left Blank**

## SECTION 5: HYDROGEN COMPRESSION

## 5.1 Hydrogen Compression Energy Use

The final step in Hydrogen production is the compression at the fueling station. The assumptions used for this part of the analysis are:

- Compression efficiency (92.0%, CA-GREET)
- Compression Fuel (electric)
- Electricity mix is marginal California mix (NG + renewable)
- Outlet compressor pressure (6250 psi, CA-GREET)

$$\text{Direct electricity use} = 10^6 * (1/92.0\% - 1) * 100\% = 86,957 \text{ Btu/mmBtu}$$

$$\text{Total electricity use} = 86,957 * (120,830 + 1,886,091)/10^6 = 174,516 \text{ Btu/mmBtu}$$

(see table 2.3 for energy required for electricity)

The direct and total electricity uses for compression are therefore 86,957 Btu/mmBtu and 174,516 Btu/mmBtu, respectively. The total for this step is therefore **261,473 Btu/mmBtu**.

## 5.2 GHG Emissions from Hydrogen Compression

As stated above, this pathway assumes that only electric compressors are used to compress hydrogen. The direct energy use is 86,957 Btu/mmBtu Hydrogen (see section 5.1 above). There are no direct emissions from electricity use, only upstream emissions. The upstream emissions associated with electricity production are provided in table

*Table 5.1 Emission Factors for California Marginal Electricity at wall outlet, g/mmBtu*

	VOC	CO	CH <sub>4</sub>	N <sub>2</sub> O	CO <sub>2</sub>
Direct	5.67	39.68	7.04	2.48	97164.74
Upstream	10.2	18.48	199.72	0.105	8217.29
<b>Total</b>	<b>15.87</b>	<b>58.16</b>	<b>206.77</b>	<b>2.58</b>	<b>104,386.95</b>

*Table 5.2 Total GHG Emissions Associated with Hydrogen Compression, g/mmBtu*

	VOC	CO	CH <sub>4</sub>	N <sub>2</sub> O	CO <sub>2</sub>	CO <sub>2</sub> *	Total GHG gCO <sub>2</sub> <sup>e</sup> / mmBtu	Total GHG gCO <sub>2</sub> <sup>e</sup> /MJ
<b>Total</b>	<b>1.38</b>	<b>5.06</b>	<b>17.98</b>	<b>0.225</b>	<b>9,077</b>	<b>9,090</b>	<b>9,606.1</b>	<b>9.11</b>

\* Includes contributions from VOC and CO. CH<sub>4</sub> and N<sub>2</sub>O also are converted to CO<sub>2</sub><sup>e</sup>.



**DRAFT – FOR REVIEW**

**This Page Intentionally Left Blank**

## **SECTION 6: GHG EMISSIONS FROM VEHICLE**

## DRAFT – FOR REVIEW

If hydrogen is utilized in a fuel cell vehicle, it is assumed that there are no vehicle CO<sub>2</sub>, CO, VOC, CH<sub>4</sub> and N<sub>2</sub>O emissions. Hence for this pathway, there are no GHG emissions from the TTW portion of the analysis. All emissions are from the WTT part of the analysis.



## **APPENDIX B**

### **GASEUOS HYDROGEN PATHWAY INPUT VALUES**

# DRAFT – FOR REVIEW

## Scenario: Gaseous Hydrogen from North American Natural Gas using California Electricity Marginal Mix

Parameters	Units	Values	Note
<b>GHG Equivalent</b>			
CO <sub>2</sub>		1	CA-GREET Default
CH <sub>4</sub>		23	CA-GREET Default
N <sub>2</sub> O		296	CA-GREET Default
VOC		3.1	CA-GREET Default
CO		1.6	CA-GREET Default
<b>Gaseous Hydrogen Production</b>			
<b>Process Efficiency</b>		71.5%	CA-GREET Default
<b>Percent of Natural gas as feedstock (Balance used as process fuel)</b>		83%	CA-GREET Default
<b>Process Fuel Shares</b>			
<i>Residual Oil</i>		0%	CA-GREET Default
<i>Conventional Diesel</i>		0%	CA-GREET Default
<i>Conventional Gasoline</i>		0%	CA-GREET Default
<i>Natural Gas</i>		99.8%	CA-GREET Default
<i>Electricity</i>		0.2%	CA-GREET Default
<b>Natural Gas Equipment Shares</b>			
<b>Industrial Boiler</b>		100%	CA-GREET Default
<i>CO<sub>2</sub> Emission Factor</i>	gCO <sub>2</sub> /mmBtu	58,215	CA-GREET Default
<b>Liquefaction</b>			
<b>Process Efficiency</b>		71.0%	CA-GREET Default
<b>Fuel Shares</b>			
<i>Conventional Diesel</i>		0%	CA-GREET Default
<i>Natural Gas</i>		0%	CA-GREET Default
<i>Electricity</i>		100%	CA-GREET Default
<b>Boil Off Losses</b>			
<i>Loss Rate</i>	%/day	0.3%	CA-GREET Default
<i>Number of Days Stored</i>	Days	5	CA-GREET Default
<i>Recovery Rate</i>		80%	CA-GREET Default
<b>Liquid Hydrogen Transport</b>			
<b>Heavy Duty Truck</b>		100%	CA-GREET Default
<b>Miles</b>		50	CA-GREET Default
<b>Boil Off Losses</b>			
<i>Loss Rate</i>	%/day	0.3%	CA-GREET Default
<i>Number of Days Stored</i>	Days	0.1	CA-GREET Default
<i>Recovery Rate</i>		80%	CA-GREET Default
<b>Liquid Hydrogen Storage at Refueling Station</b>			
<b>Boil Off Losses</b>			
<i>Loss Rate</i>	%/day	0.3%	CA-GREET Default
<i>Number of Days Stored</i>	Days	3	CA-GREET Default
<i>Recovery Rate</i>		80%	CA-GREET Default
<b>Hydrogen Compression at Refueling Station</b>			
<i>Compression Efficiency</i>		92.0%	CA-GREET Default

